

KONE KSS 570

Modernization of elevator signalization

This surface-mounted signalization solution is designed for use in residential and commercial buildings.

Saving energy

KONE has developed solutions that reduce energy consumption by dimming the signalization in the car at a preset time after the elevator has been used. This reduces signalization electricity consumption by up to 30% depending on the number of screens and the graphics of the screens.



Key Benefits

Eco-efficient

- Eco-efficient LED call registration illumination with choice of colors (amber, white, blue)
- Dimming feature when elevator not in use

Safe

- Increases safety and accessibility of elevator users
- Complies with EN81-70 (European Accessibility Standard)
- Complies with EN81-72 (European Firefighting Standard)*
- KONE Remote Monitoring for two-way emergency communication with KONE Customer Care Center*
- Intercom systems*


Versatile and stylish

- Serial electrical interface
- Surface mounting with fixed face plate size
- Stainless steel faceplate with aluminum frame
- Available with choice of finishes (satin and polished stainless steel & golden polished stainless steel)
- Landing position indicator available with adjustable arrival gong volumes and scrolling text indication fields
- Durable metallic buttons in round or square formats
- Key fob operation: call or disable elevator remotely*
- PIN Code locking feature removing the need for key switches*

* Optional



KSC 573 scrolling dot matrix / 575 black and white LCD

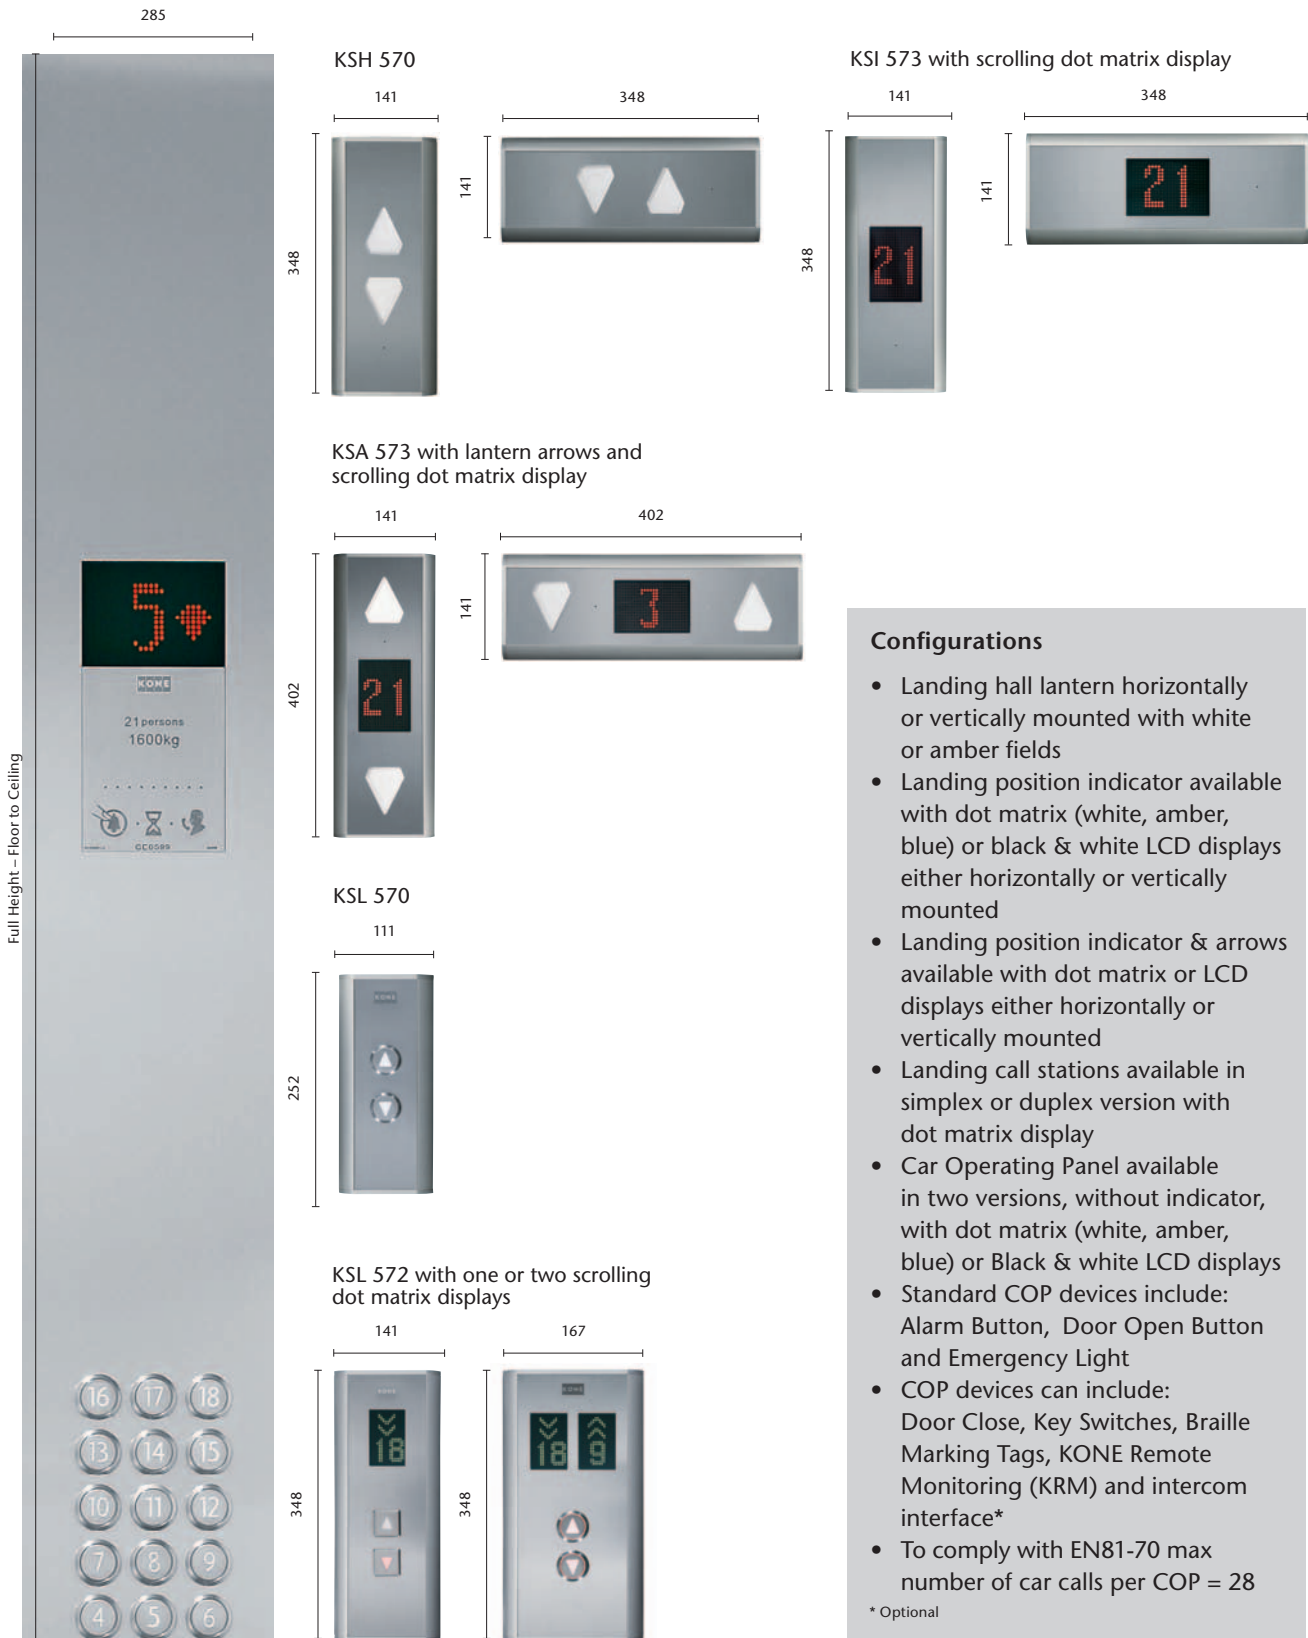

Configurations

- Landing hall lantern horizontally or vertically mounted with white or amber fields
- Landing position indicator available with dot matrix (white, amber, blue) or black & white LCD displays either horizontally or vertically mounted
- Landing position indicator & arrows available with dot matrix or LCD displays either horizontally or vertically mounted
- Landing call stations available in simplex or duplex version with dot matrix display
- Car Operating Panel available in two versions, without indicator, with dot matrix (white, amber, blue) or Black & white LCD displays
- Standard COP devices include: Alarm Button, Door Open Button and Emergency Light
- COP devices can include: Door Close, Key Switches, Braille Marking Tags, KONE Remote Monitoring (KRM) and intercom interface*
- To comply with EN81-70 max number of car calls per COP = 28

* Optional

All dimensions are shown in millimeters.

For more information go to KONE.com